

TM120N03NF

N-Channel Enhancement Mosfet

General Description • Low $R_{DS(ON)}$ • RoHS and Halogen-Free Compliant Applications • Load switch • PWM	General Features $V_{DS} = 30V$ $I_D = 120A$ $R_{DS(ON)} = 3.0m\Omega (typ.) @ V_{GS} = 10V$ 100% UIS Tested 100% R_g Tested 
NF:DFN5x6-8L D D D D S S S G D D D D S S S S </	

TM120N03NF

N-Channel Enhancement Mosfet

Electrical Characteristics (T_J=25 °C, unless otherwise noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	30	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =24V, V _{GS} =0V T _J =85°C	-	-	1 30	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	0.9	1.2	1.5	V
I _{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
R _{DS(ON)} ^d	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =20A T _J =125°C	-	3 4.4	3.8 -	mΩ
		V _{GS} =4.5V, I _{DS} =15A	-	4.0	4.9	
Gfs	Forward Transconductance	V _{DS} =5V, I _{DS} =10A	-	24.6	-	S
Diode Characteristics						
V _{SD} ^d	Diode Forward Voltage	I _{SD} =20A, V _{GS} =0V	-	0.8	1.1	V
t _{rr}	Reverse Recovery Time	I _{DS} =20A, dI _{SD} /dt=100A/μs	-	35.6	-	ns
t _a	Charge Time		-	19.3	-	
t _b	Discharge Time		-	16.3	-	
Q _{rr}	Reverse Recovery Charge		-	26	-	nC
Dynamic Characteristics ^e						
R _G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz	-	1	2	Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =15V, Frequency=1.0MHz	-	2485	2971	pF
C _{oss}	Output Capacitance		-	850	-	
C _{rss}	Reverse Transfer Capacitance		-	85	-	
t _{d(ON)}	Turn-on Delay Time	V _{DD} =15V, R _L =15Ω, I _{DS} =1A, V _{GEN} =10V, R _G =6Ω	-	12.4	23	ns
t _r	Turn-on Rise Time		-	9.5	18	
t _{d(OFF)}	Turn-off Delay Time		-	27.2	49	
t _f	Turn-off Fall Time		-	35.2	64	
Gate Charge Characteristics ^e						
Q _g	Total Gate Charge	V _{DS} =15V, V _{GS} =10V, I _{DS} =20A	-	20.6	28.8	nC
Q _g	Total Gate Charge	V _{DS} =15V, V _{GS} =4.5V, I _{DS} =20A	-	9.8	-	
Q _{gth}	Threshold Gate Charge		-	1.8	-	
Q _{gs}	Gate-Source Charge		-	3.8	-	
Q _{gd}	Gate-Drain Charge		-	3.7	-	

TM120N03NF


N-Channel Enhancement Mosfet

Typical Operating Characteristics


Power Dissipation

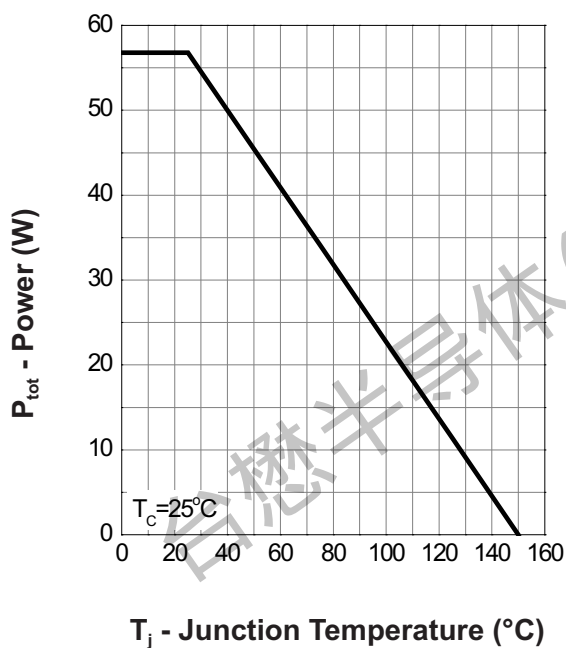


Drain Current

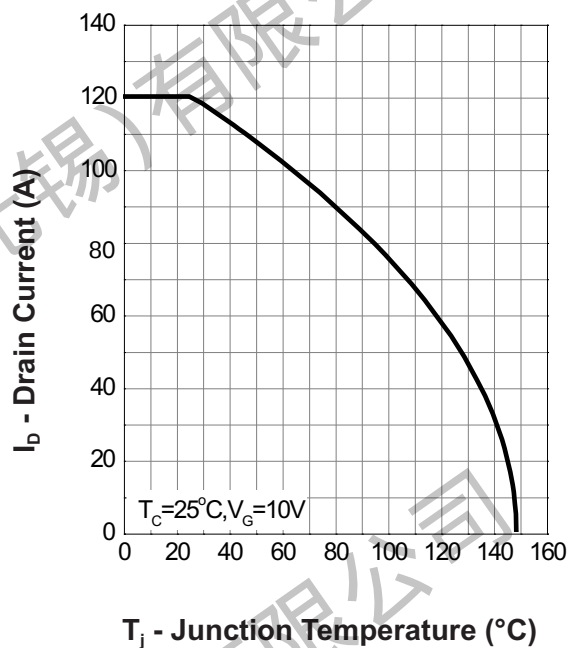

Safe Operation Area

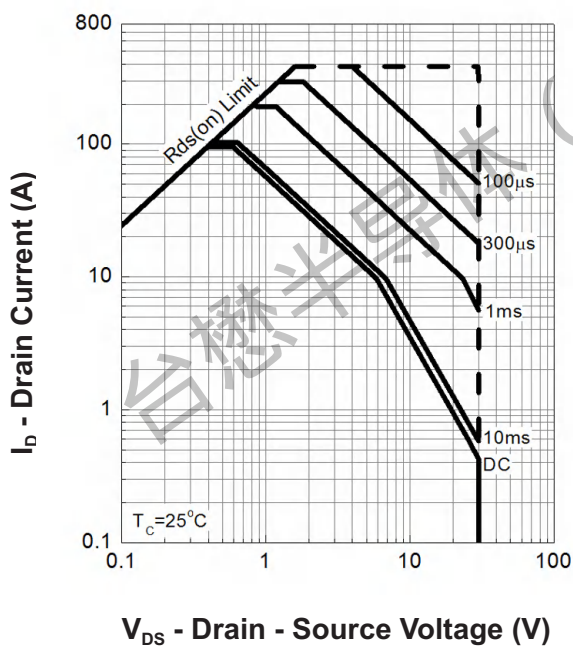


Thermal Transient Impedance

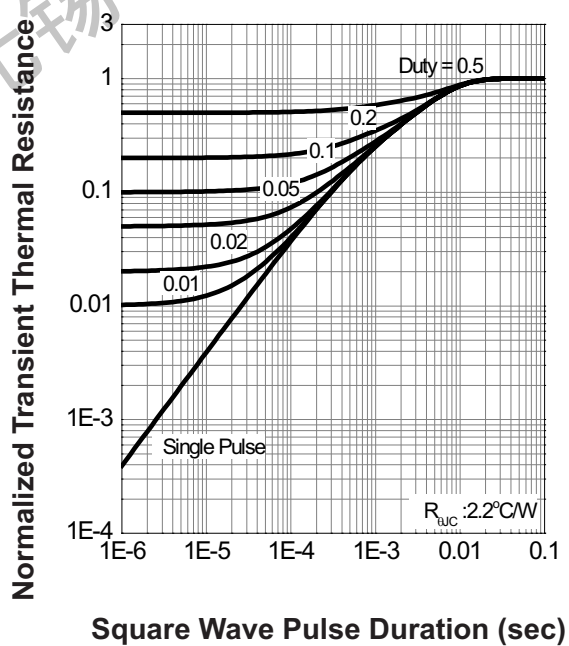


TM120N03NF

N-Channel Enhancement Mosfet


Safe Operation Area

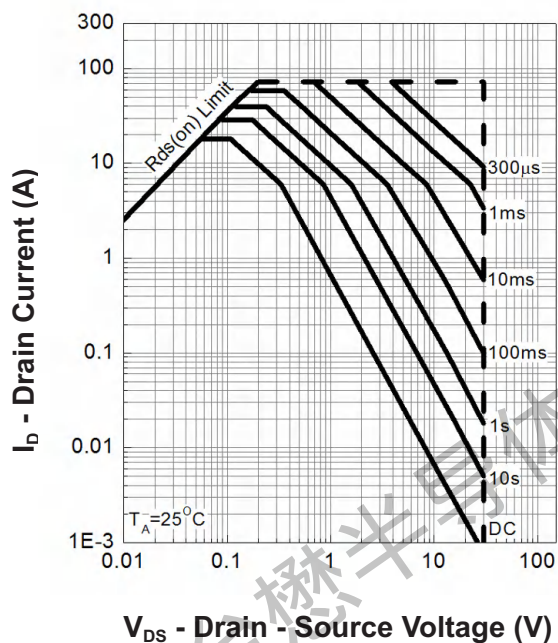


Thermal Transient Impedance

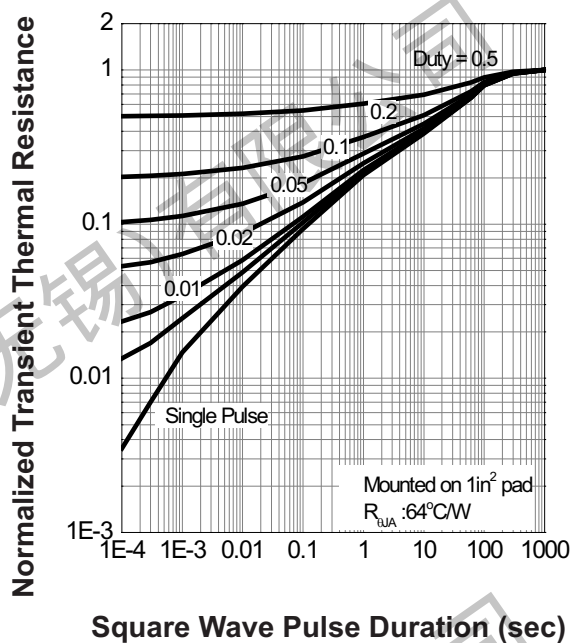

Output Characteristics

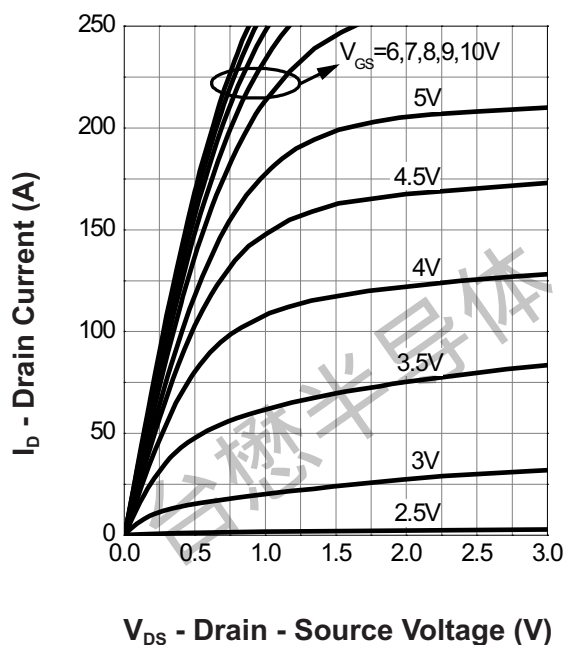

Drain-Source On Resistance

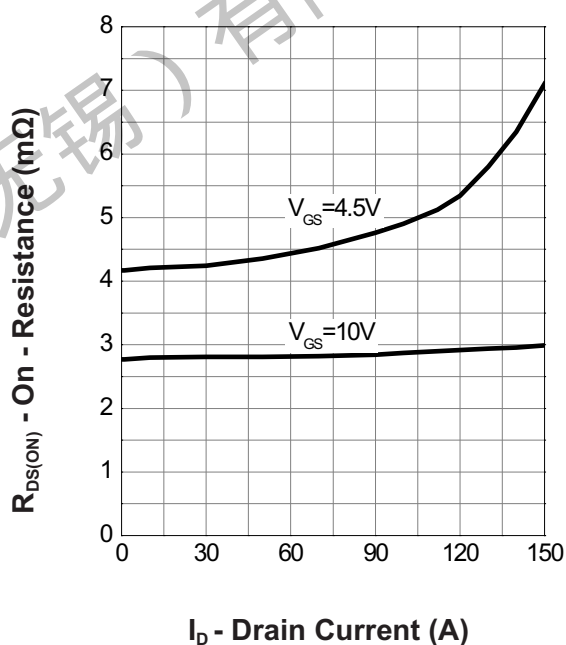





TM120N03NF

N-Channel Enhancement Mosfet


Gate-Source On Resistance

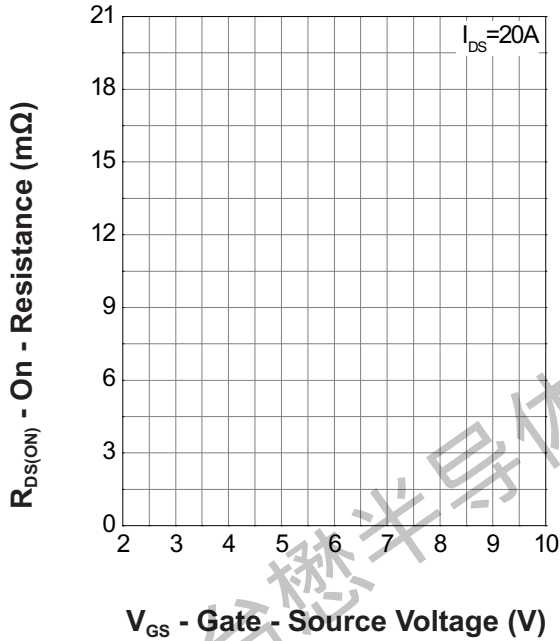


Gate Threshold Voltage

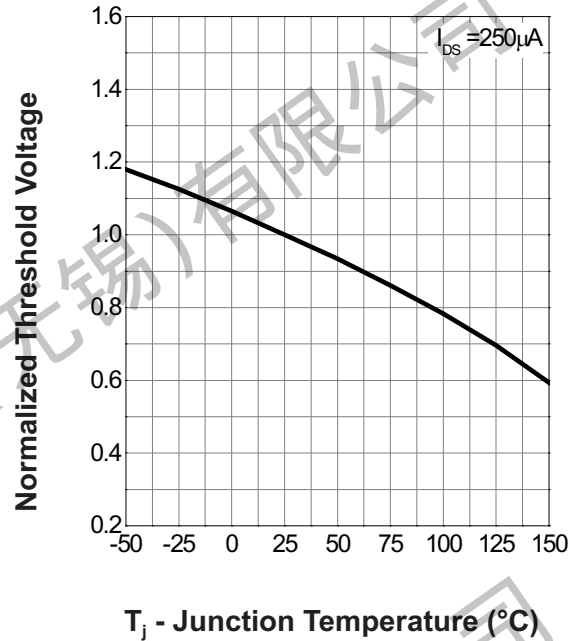

Drain-Source On Resistance

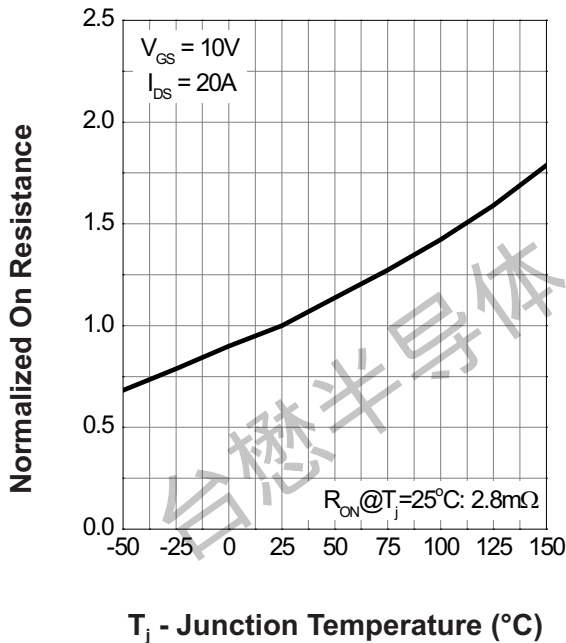


Source-Drain Diode Forward

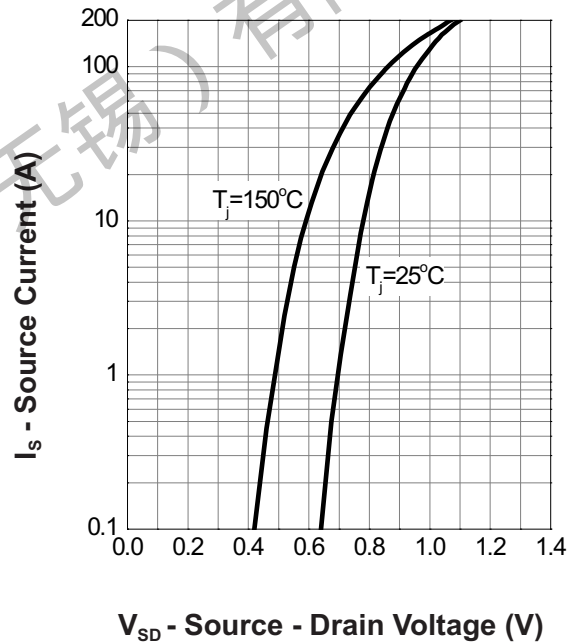


TM120N03NF

N-Channel Enhancement Mosfet

Capacitance

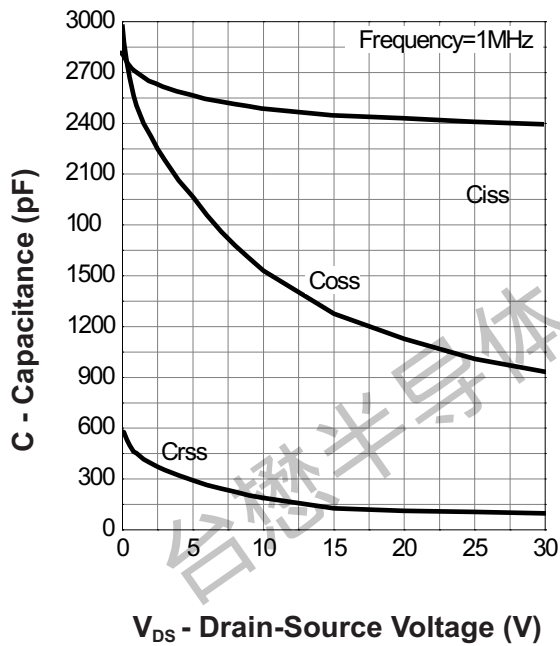


Gate Charge

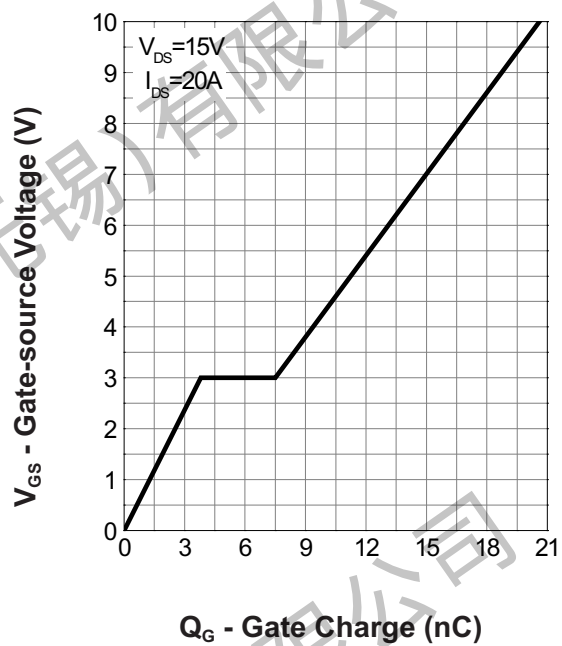

TM120N03NF

N-Channel Enhancement Mosfet

Package Mechanical Data:DFN5x6-8L

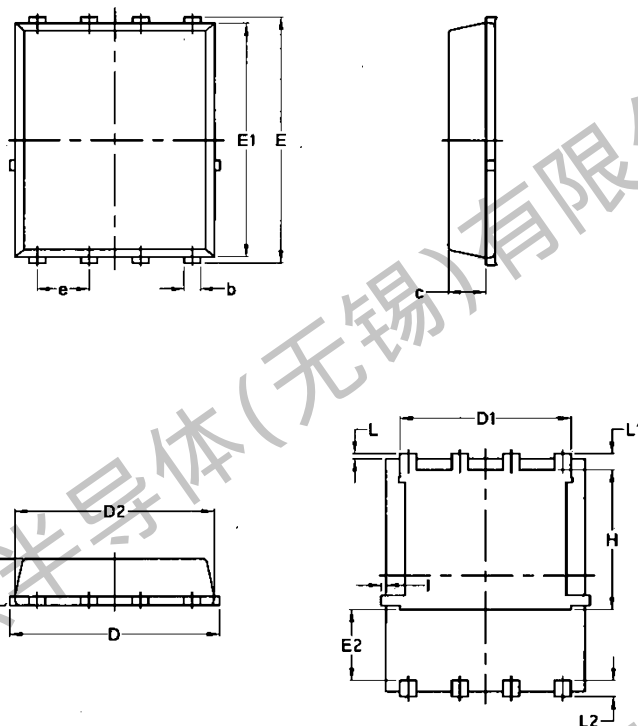


Symbol	Common			
	mm		Inch	
	Mim	Max	Min	Max
A	1.03	1.17	0.0406	0.0461
b	0.34	0.48	0.0134	0.0189
c	0.824	0.0970	0.0324	0.082
D	4.80	5.40	0.1890	0.2126
D1	4.11	4.31	0.1618	0.1697
D2	4.80	5.00	0.1890	0.1969
E	5.95	6.15	0.2343	0.2421
E1	5.65	5.85	0.2224	0.2303
E2	1.60	/	0.0630	/
e	1.27 BSC		0.05 BSC	
L	0.05	0.25	0.0020	0.0098
L1	0.38	0.50	0.0150	0.0197
L2	0.38	0.50	0.0150	0.0197
H	3.30	3.50	0.1299	0.1378
I	/	0.18	/	0.0070

TM120N03NF

N-Channel Enhancement Mosfet

PDFN5×6-8L Embossed Carrier Tape

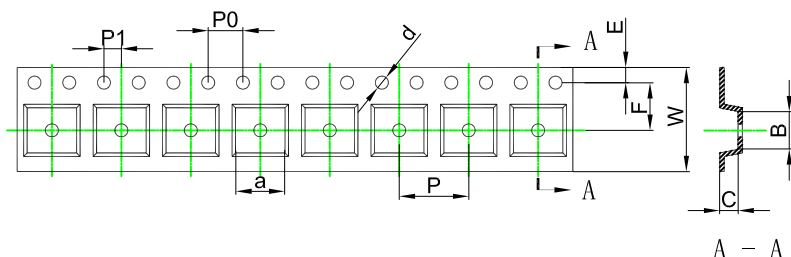


Packaging Description:

SOP-8L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 2,500 units per 13" or 33cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


ALL DIM IN mm

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
PDFN5×6-8L	6.40	5.40	2.10	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

PDFN5×6-8L Tape Leader and Trailer

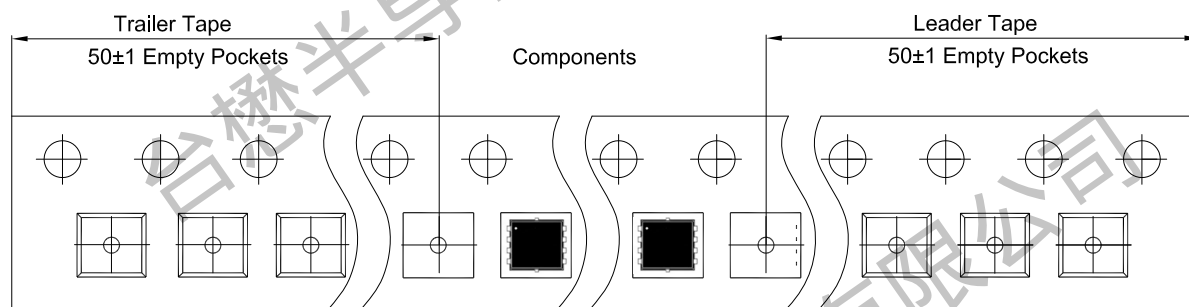

PDFN5×6-8L Reel

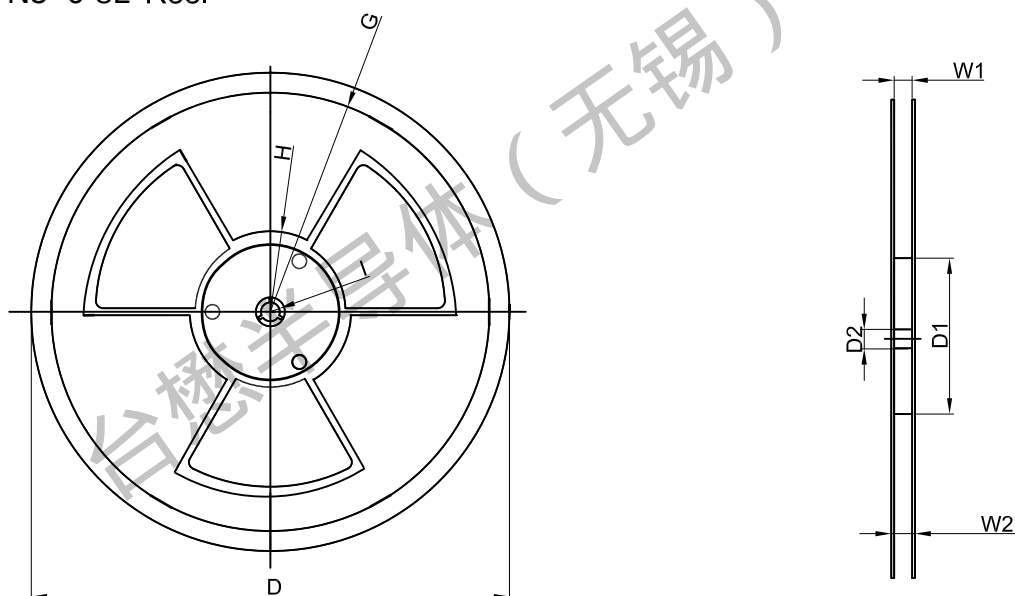

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
13"Dia	Ø330.00	100.00	13.00	R135.00	R55.00	R6.50	12.00	14.00

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
5,000 pcs	13 inch	10,000 pcs	370×355×52	50,000 pcs	400×360×368	

Important Notices and Disclaimers

- Tritech-MOS Technology Corp.reserves the right to change thisdocument, its products, and specifications at any time without prior notice.
- Before final design, purchase, or use, customers should obtain and confirm the latest product information and specifications.
- Tritech-MOS Technology Corp. makes no warranties, representations or warranties regarding the suitability of its products for any specific purpose, and Tritech-MOS Technology Corp. does not assume any responsibility for application assistance or customer product design.
- Tritech-MOS Technology Corp. does not guarantee or assume any responsibility for the purchase or use of any unexpected or unauthorized products.
- Any intellectual property rights of Tritech-MOS Technology Corp. are not licensed through implicate or other means.
- Products of Tritech-MOS Technology Corp. are not included as critical components in life support equipment or systems without explicit written approval from Tritech-MOS Technology Corp.

Revision history:

Date	Rev	Description	Page
2023.11.14	23.11	Original	